

The SaniServ® Model 614SAS Select-A-Shake freezer provides up to four flavors of uniform, smooth, high profit shakes! The 614SAS automatically mixes each shake uniformly to insure a perfect milkshake in the flavor desired! Owners and operators will appreciate the machine's quick recovery time and ability to provide everyone's favorite flavor quickly even during peak operating periods! The 614SAS can satisfy everyone with their favorite flavor every time!

DESIGNED FOR HIGHER VOLUME APPLICATIONS

Five - 16 oz. Shakes per Minute - 20 Quart Capacity

Use SaniServ[®] Model 614SAS to Create



About the 614SAS Cooling Options









Dimensions: Width (17") Depth (24.8") Height (56.8") Weight (338 lbs)

Electrical Requirements:

208-230/60/1 = 25 Amps 208-230/60/3 = 20 Amps

Serving Estimate:

Up to 300 Milkshakes / hr

We reserve the right to change specifications and product designs without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.







SPACE SAVING - Compact Floor Model Design

SaniServ[®] model 614SAS provides a high volume of milkshake in the traditional floor model design. Operators can turn that valuable floor space into a high profit center by providing consistent high quality shakes customers demand.

▼ EASY CLEANING AND OPERATION - Fewer Parts = Simplified Cleaning

SaniServ[®] equipment is designed and built with the fewest parts to be disassembled, cleaned and sanitized than any other machine in the industry.

✓ HIGH RETURN ON INVESTMENT - Increased Profits


SaniServ[®] machines combine efficiency with consistent product quality and fast, quiet operation while ensuring customer satisfaction with high profit ice cream or yogurt products.

✓ OUALITY DESIGN - Durability

SaniServ[®] machines are built to achieve long and dependable life through simplicity of design. Every machine is shipped standard with a stainless steel exterior, durable steel interior frame construction, heavy-duty components and consistency systems.



Minimum Wall Clearance Both Sides and Back 6 inches (152 mm)

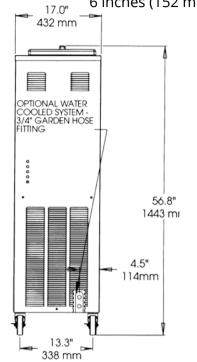

31.2" 792 mm 18.8" 478 mm 22.0" 559 mm

	ELECT	RICAL		WIDTH	HEIGHT	DEPTH	WEIGHT	VOLUME
VOLTS	Hz	Ph.	Amps	INCHES (MM)	INCHES (MM)	INCHES (MM)	LBS. (Kg)	CU FT. (cu. m.)
208-230	60	1	25	17 (432)	56.8 (1443)	24.8 (630)	338 (153)	
208-230	60	3	20					
	Shipping Sp	ecifications		24.5 (622)	58.1 (1476)	40.5 (1028)	420 (191)	32.5 (.92)

24.8"

630 mm

SPECIFICATIONS

Cooling System:

Air or Water

Dasher and Compressor Motors:

1/4 HP Dasher 2 HP Compressor

Refrigerator Type:

R404A

Listings:

UL, cUL, NSF

This unit requires CO2 connection and a water line connection. the unit comes with 10' syrup line, (3) three gallon canisters, and one regulator.

FEATURES

Evaporator and Mix Reservoir Capacity:

20 Quarts (18.9 liters)

Dasher:

Heavy-Duty Stainless Steel with low friction scraper blades.

Controls:

Automatic consistency controls for improved consistency.

Tamper Proof Automatic Visual Mix Out System

WARRANTY

Parts 1 year Compressor 5 years Evaporator 5 years

Options:

Drink Spinner
Tune Up Kit
Syrup Rail
Water Cooled - 3/4" Garden
Hose Fitting
Wash Out Kit - 3/8" Flare Fitting
Export Voltages