




Job: _____

Item No. _____

Remote Condensing Unit

Designed for High Volume Applications

- ✓ Outdoor rated, 2 HP condenser
- ✓ Galvanized all-weather enclosure
- ✓ Contractor mounted and wired
- ✓ High and low pressure controls mounted and wired separately
- ✓ Immersion type crankcase heater

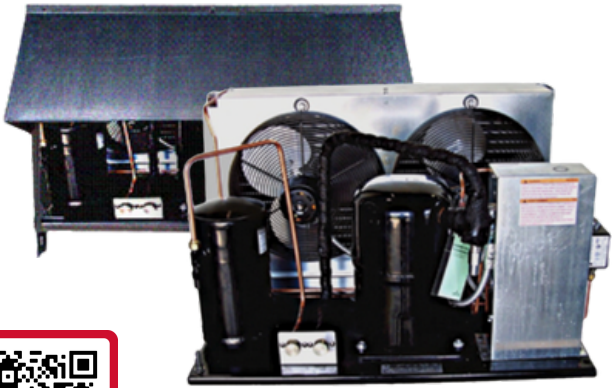

SaniServ® Model ROC2361 (by Copeland®) Remote Condensing Unit, can be used with any **SaniServ®** remote ready dispensing unit.

Optional: 25', 50', and 75' pre-charged lines available

We reserve the right to change specifications and product designs without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.



Want to Learn More?

Dimensions: Width (31.4") Length (25.1")
Height (18.9") Shipping Weight (202 lbs)



SPECIFICATIONS

| Mechanical | |
|--------------------------------------|-------|
| Condenser Type: | Air |
| Copevap Water Storage: | NA |
| Receiver Capacity (lbs): | 10.3 |
| Liquid Connection Size (in) / Type: | 3/8 S |
| Suction Connection Size (in) / Type: | 7/8 S |
| Discharge Line Size (in) | 3/8 |
| Water Inlet () | |
| Water Outlet () | |
| Oil Type: | POE |
| Oil Recharge Amount (oz): | 45 |

| Electrical | |
|--------------------------------|-----------------|
| Max Fuse Size: | 25 |
| Min Circuit Ampacity: | 17.8 |
| Compressor: | CS14K6E-PFV-273 |
| Compressor LRA - Low: | |
| Compressor LRA - High: | 61.0 |
| Compressor LRA - Half Winding: | |
| Compressor RLA: | 12.4 |
| Amps Per Motor: | 0.85 |
| Fan Motor Quantity: | 2 |

| Air - Cool Unit Performance | | | |
|-----------------------------|---------------------|-----------------------|------|
| Release Date: | 06-Jun-2002 | Return Gas Temp. (°F) | 40 |
| Compressor: | CS14K6E-PFV-273 x 1 | Subcooling (°F): | 5 |
| Performance No: | 3755 | Air Flow Rate (CFM): | 1680 |

| 90° F Ambient Air Temperature | | | |
|-------------------------------|------------------------|------------------|-----------------|
| Evap Temp (°F) | Unit Capacity (Btu/hr) | Cond. Temp. (°F) | Temp. Diff (°F) |
| -5 | 9,030 | 105.5 | 15.5 |
| 0 | 10,400 | 107.4 | 17.4 |
| 5 | 11,900 | 108.8 | 18.8 |
| 10 | 13,400 | 110.6 | 20.6 |
| 15 | 14,900 | 112.4 | 22.4 |
| 20 | 16,400 | 114.1 | 24.1 |
| 25 | 17,900 | 115.9 | 25.9 |

| ELECTRICAL | | | | WIDTH | HEIGHT | DEPTH | WEIGHT | VOLUME |
|-------------------------|----|-----|------|-------------|-------------|-------------|-----------|-----------------|
| VOLTS | Hz | Ph. | Amps | INCHES (MM) | INCHES (MM) | INCHES (MM) | LBS. (Kg) | CU FT. (cu. m.) |
| 208-230 | 60 | 1 | 20 | 17 (432) | 29.3 (744) | 23.9 (607) | 220 (100) | |
| 208-230 | 60 | 3 | 15 | | | | | |
| Shipping Specifications | | | | 22.5 (571) | 41 (1042) | 34.5 (876) | 280 (127) | 18.5 (.53) |